

### TECHNISCHE DATEN:

#### Aufbau

Hutmutter	Messing CuZn39Pb3, galv. vernickelt
Dichteinsatz	TPE TPS
Zwischenstutzen	Messing CuZn39Pb3, galv. vernickelt
O-Ring	Nitrilkautschuk NBR
Anschlussgewinde	metrisch, nach EN 60423

#### Eigenschaften

- sichere und kabelschonende Abdichtung
- hohe Zugentlastung
- großer Dicht- und Klemmbereich
- der Dichteinsatz kann schnell auf den vorhandenen Kabeldurchmesser angepasst werden
- Werkstoff des Dichteinsatzes erfüllt UL 94 HB
- gute UV-, Ozon- und Witterungsbeständigkeit

Temperaturbereich -40 °C / +100 °C (dynamisch)

Schutzart IP66 / IP68 - 10 bar (30 min.) / IP69

Prüfnorm EN 62444

### TECHNICAL DATA:

#### Configuration

Dome nut	Brass CuZn39Pb3, nickel-plated
Sealing insert	TPE TPS
Gland body	Brass CuZn39Pb3, nickel-plated
O-ring	Nitrile rubber NBR
Connecting thread	metric, as per EN 60423


#### Properties

- large-area sealing protects the cable
- integrated anchorage with high retention
- wide sealing and clamping range
- the inner sealing ring can be removed easily for larger cables
- material of the sealing insert fulfills UL 94 HB
- high UV, ozone and weather resistance

Temperature range -40 °C / +100 °C (dynamic)


Protection grade IP66 / IP68 - 10 bar (30 min.) / IP69

Test standard EN 62444

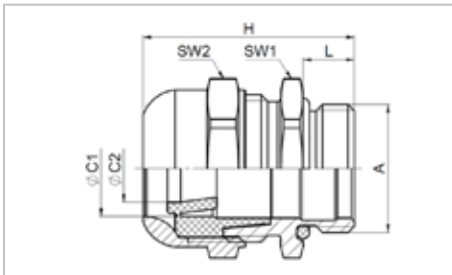

### Merkmale

### Characteristics

Anschlussgewinde Standardlänge				Connecting thread standard length					Art.-Nr. / Part No.
A	ØC	ØC2	ØC1	L	SW1	SW2	H		
	mm	mm	mm	mm	mm	mm	mm		
M12x1,5	3 - 8	3 - 5	5 - 8	6,5	16	16	25,5	100	K150-1012-00
M16x1,5	5 - 10,5	5 - 7,5	7,5 - 10,5	7,0	20	20	31,5	100	K150-1016-00
M20x1,5	8 - 15	8 - 10,5	10,5 - 15	8,0	25	25	33	50	K150-1020-00
M25x1,5	12,5 - 20,5	12,5 - 15,5	15,5 - 20,5	8,0	32	32	35,5	50	K150-1025-00
M32x1,5	17 - 25,5	17 - 20,5	20,5 - 25,5	9,0	36	36	40,5	25	K150-1032-00
M40x1,5	24 - 33	24 - 29	29 - 33	9,0	45	45	43	10	K150-1040-00
M50x1,5	31 - 42	31 - 37,5	37,5 - 42	10,0	55	55	47,5	5	K150-1050-00
M63x1,5	40 - 53	40 - 46	46 - 53	10,0	70	70	53	5	K150-1063-00